


Temporary Communication Coverage


E-Pack features fast and flexible networking. For emergency cases or outdoor operations which need a temporary communication system, E-Pack can better solve this problem.

Typical Application

When there is field operation, it is a must to build a temporary communication system. Hytera E-Pack can quickly establish wireless communication networks, providing communication support for emergency rescue, field construction and other events.

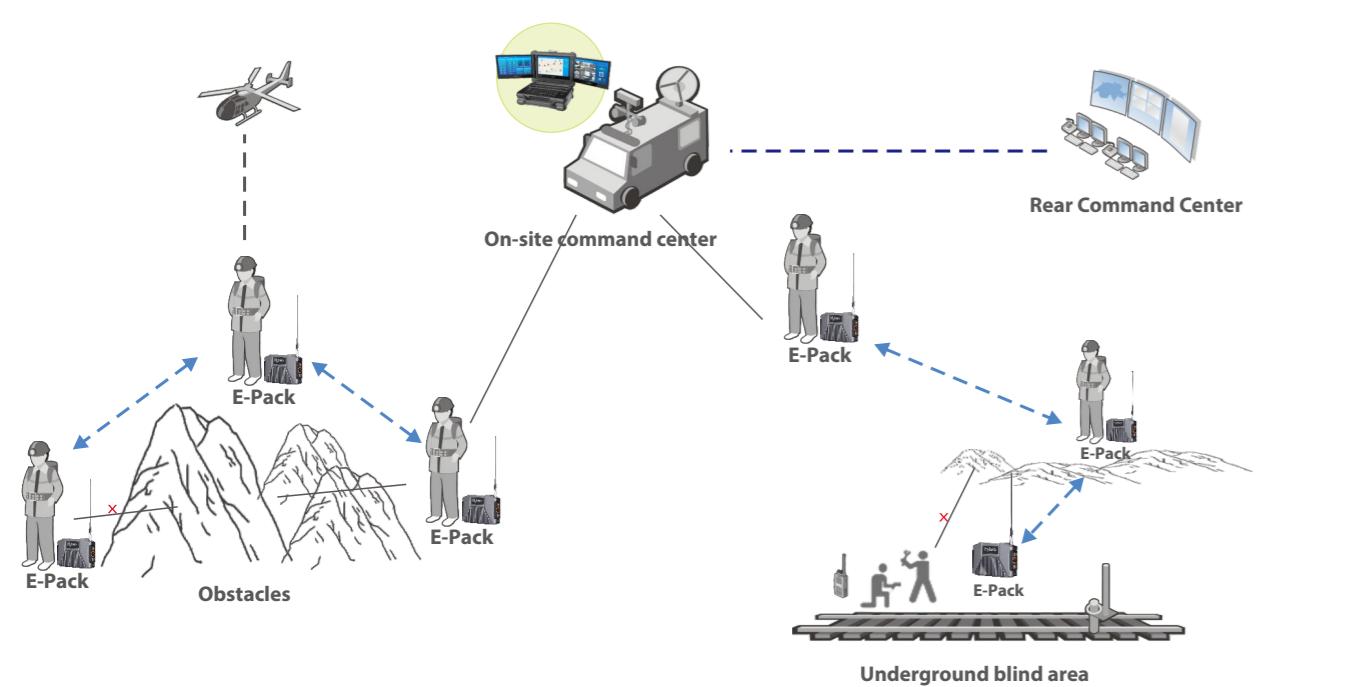

Accessories

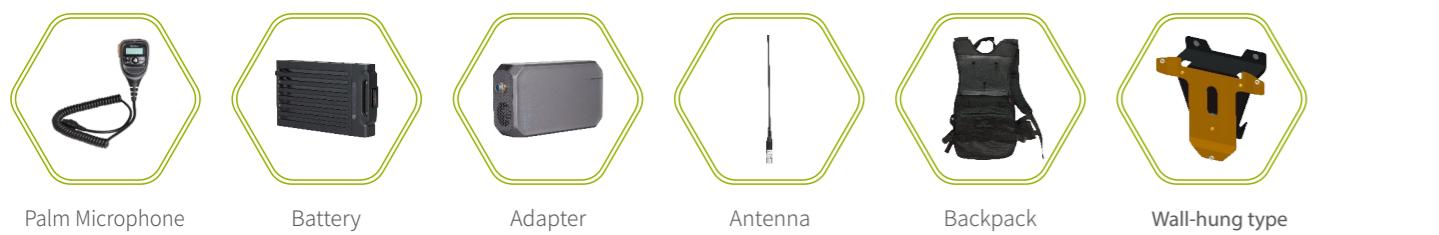

Palm Microphone

Battery

Adapter

Antenna

Backpack

Wall-hung type

Specifications

Receiver		General	
Sensitivity	≤-116dBm (Typical Value: -118dBm)	Private Network Mode	DMO Mesh
Conducted Spurious Emission	<-57dBm@9KHz-1GHz <-47dBm@>1GHz	Node Capacity	3
Blocking	-40dBm@50KHz~100KHz	Battery Capacity	187Wh(12.5Ah)
Transmitter		Frequency	
Output Power (Low)	1W	380-430MHz	
Output Power (Medium)	5W		
Output Power (High)	10W		
Adjacent Channel Power	60dB @ 25KHz 70dB @ 50KHz		
Environment		Output Power	
Operating Temperature	-30°C~+60°C	1W/5W/10W adjustable	
Storage Temperature	-40°C~+85°C	Vocoder	ACELP
Shock & Vibration	MIL-STD-810 C/D/E/F/G	Channel Spacing	25KHz
Ingress Protection Rating	IP67	Operating Voltage	Rated 14.4V
Moisture Proof	MIL-STD-810 C/D/E/F/G	Standby Current	<0.8A
ESD	IEC 61000-4-2 (level 4) ±8kV (contact discharge) ±15kV (air discharge)	TX Current	1W<3.5A; 5W<4.5A; 10W<5.5A;
		Frequency Stability	±0.5ppm
		Antenna Impedance	50Ω
		Dimensions(H*W*D)	187x295x68mm
		Weight	3.8KG (with battery)



E-Pack100 (TETRA)

Digital Wireless Ad Hoc Repeater

- Wireless Mobile Ad Hoc Networking
- Link Automatic Detection
- Fast Deployment
- Flexible and Reliable Networking
- High Spectrum Efficiency



Hytera
Respond & Achieve



CE

Hytera Communications Corporation Limited

Address: Hytera Tower, Hi-Tech Industrial Park North, Beihuan Rd, Nanshan District, Shenzhen, China
Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057
Http://www.hytera.com Stock Code: 002583.SZ




Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.
HYT, Hytera are registered trademarks of Hytera Communications Co.,Ltd. © 2025 Hytera Communications Co.,Ltd. All Rights Reserved.



Overview

Hytera E-Pack is intended for fast and flexible communication system deployment. The E-Pack can not only be used as a radio to make and receive calls, it also can create a wireless mobile Ad Hoc network to route voice. As Hytera IP(Intellectual Patent), one E-Pack function as a radio, repeater and mesh node with one frequency, highly saving frequency resources. With light, small and IP67 design, the E-Pack can be installed in a vehicle, carried by a backpack, pole-mounted ,or wall-mounted fairly suitable for temporary communication or indoor coverage.

Product Introduction

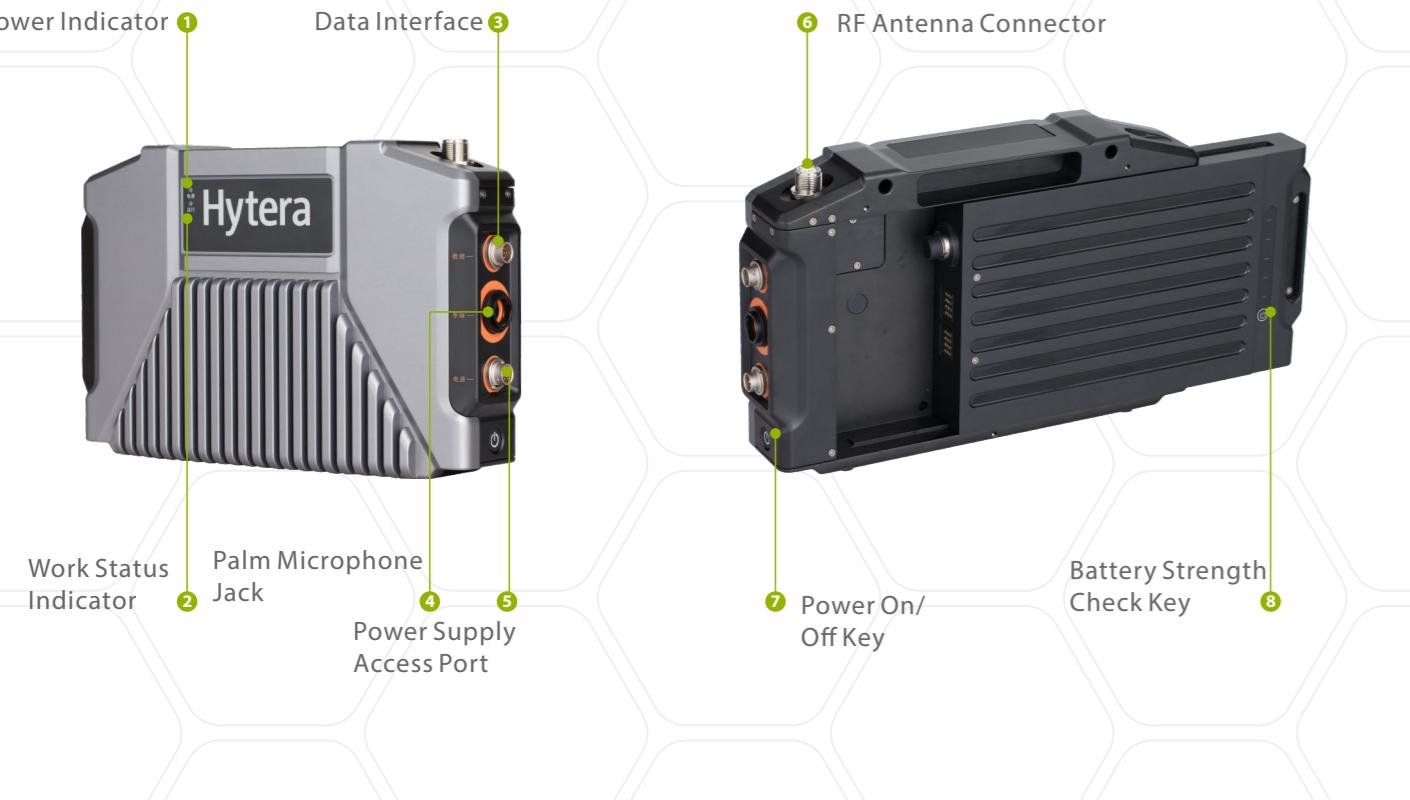

Highlights

Wireless Mobile Ad Hoc Networking

Hytera E-Pack(TETRA) can create a wireless mobile Ad Hoc network,in which threare are 3 nodes. The Ad Hoc network is self-configuring and dynamic in which E-Pack nodes are free to move.

Fast Deployment


The E-Pack network does not require on-site configuration. It is capable of creating and joining networks to deploy the communication system as soon as it is powered on.

Reliable Quality

Hytera E-Pack is strictly compliant with MIL-STD-810 C/D/E/F/G standards and water and dust proof rating is up to IP67,ensuring outstanding performance even under harsh environments.

Highly Reliable Networking

If one E-Pack node moves away from the network or malfunctions,voice will automatically route to another E-Pack node in order to guarantee link continuity.

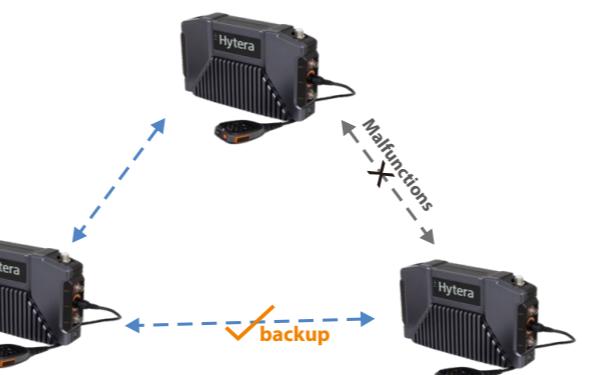


High Spectrum Efficiency

Based on TDMA and FDMA technology, one frequency can be used to make calls and route voice at the same time, greatly saving frequency resources.

Connect to On-site command center

Any network node of E-Pack can be connected with the command center to realize unified command and operation management of E-Pack network by the command center.

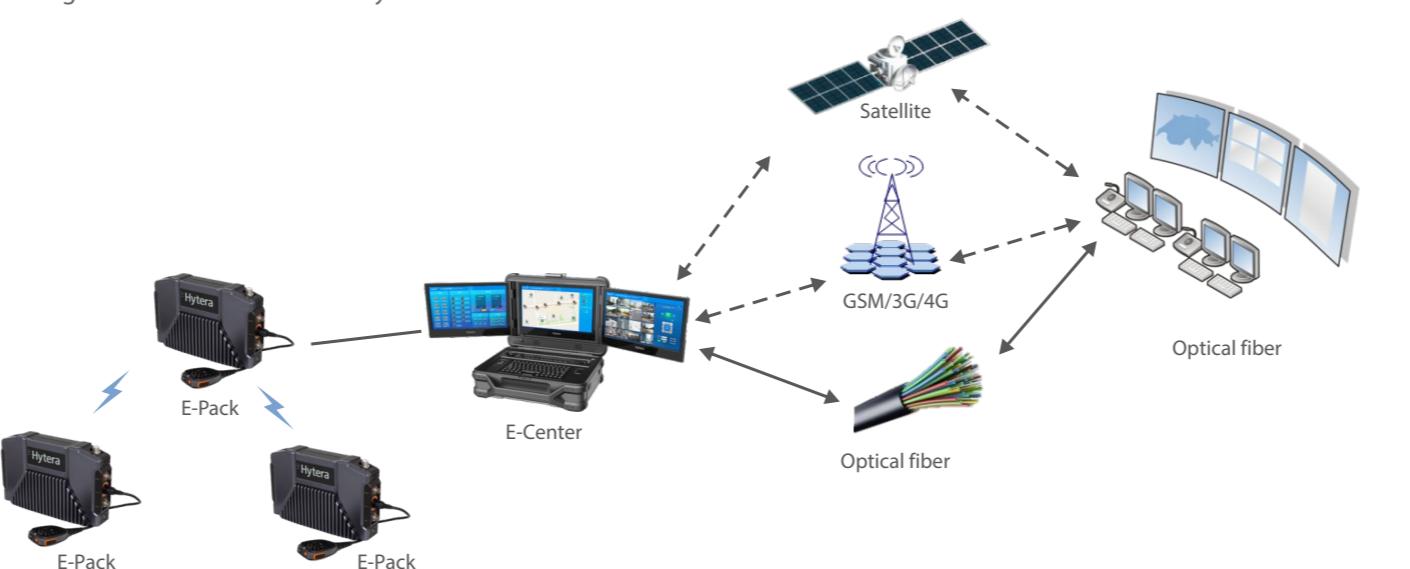

Application

Blind Area Coverage

Due to the high output power of the E-Pack communications will not be affected by the topology of the area, different floors or obstacles etc.

Typical Application

In high buildings, the signal is poor due to space propagation loss and penetration loss. Using E-Pack, smoothcommunication between basement and the building roof can be achieved.

